


NILAND/LED

Leading the Way For Solid State Street Lighting



Solid State Lighting
Reliability. Longevity. Savings.

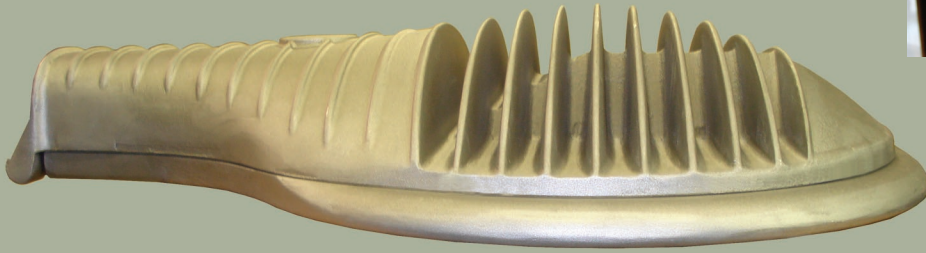

Manufacturing Americas Finest Outdoor Lighting Products Since 1972



OUTDOOR LIGHTING SPECIALISTS SINCE 1972
320 N Clark Drive · El Paso, TX 79905
ph:(800)648-9013 toll free fx:(888)779-3065 toll free

What?

LED is the most common abbreviation for a light-emitting diode but is also known as solid-state lighting (SSL). Each LED consists of a semi conductor diode that emits light when a voltage is applied to it. Traditionally, LEDs have been used as indicator lights for multiple electronic devices. More recently, solid-state lighting technology has developed to the point where it is viable for general lighting operations.

Outperforming HIDs

LED's offering bright white lights have the advantage of minimal lumen depreciation, better visual acuity and high lumens per watt. LED technology has a vastly longer lifespan than traditional lamp sources. These units can easily replace commonly used HID fixtures. LED luminaires are also more environmentally friendly in that they contain no mercury, last longer and are virtually maintenance free.

UP TO **68%** ELECTRICAL SAVINGS

COMPARED TO CONVENTIONAL HPS & MH

Niland LED street light luminaires are designed to replace high pressure sodium and metal halide lamps in nearly any desired fixture style.

Energy efficient, maintenance free and easy to install, Niland LED street light luminaires use approximately $\pm 50\%$ less electricity than traditional high pressure sodium or metal halide lamps. In addition, Niland LED panels and potted drivers have a service life of over **30 years!**

Utilizing Niland LED's universal power supply and circuit board designs, the Niland LED street light luminaires have a variable input voltage of 90 to 305VAC (optional 480VAC) and a total light output of up to 7000 lumens. Niland LEDs' circuitry will recognize and adapt to **ANY** input voltage.


The ability to retrofit existing street light fixtures with cost effective and energy efficient LEDs is an economical advantage for both the government and private industries. When you compare the combined electrical requirements of a 250 watt high pressure sodium lamp and ballast to the low wattage required by the Niland LED driver, the maintenance and electrical savings are immediate.

Longevity

Unlike more traditional light sources, LEDs normally don't "burn out" but instead progressively dim over time. Only Niland LEDs are controlled to deliver nearly **0% light loss** factor with programming the high power LEDs to use 70% of it's intended power. Once light loss begins, power is gradually added to maintain the nearly 0% loss factor.

Niland LEDs, combined with an enhanced thermal management design, offer a useful life that may reach over **100,000 hours**.

The graph below demonstrates the average delivered lumens over the course of 60,000 hours between Niland LEDs and a 400 watt Metal Halide lamp. Niland LEDs have a significantly better lumen maintenance and a more efficient driver.

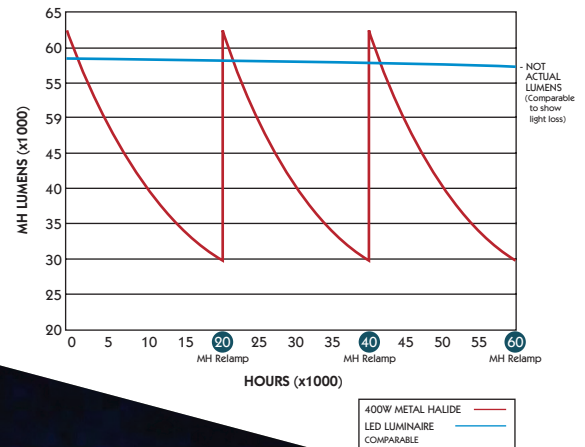

ALL LED PRODUCTS MANUFACTURED IN THE UNITED STATES.



Niland
COMPANY

OUTDOOR LIGHTING SPECIALISTS SINCE 1972
320 N Clark Drive · El Paso, TX 79905
ph:(800)648-9013 toll free fx:(888)779-3065 toll free

FEATURES & BENEFITS

- MADE IN THE USA -

Increased Visual Acuity

White LEDs provide a clear, crisp daylight look for ultimate visibility.

Minimal Energy Consumption

Each unit consumes approximately 1/2 or more of the electrical power of traditional HID lighting. Additional savings are achieved with less lumens per watt needed.

Decreased Maintenance

Today's downsized workforce still have the same workloads to accomplish the same results. Niland LED technology drastically reduces maintenance normally required with traditional lighting systems. HPS and MH lamps have an average life of 4-6 years. Our LED system is rated for up to 30 years of maintenance free service.

Going Green

With out the use of mercury and coupled with a long lifespan, Niland LED fixtures reduce the amount of waste associated with many traditional lighting systems.

Dark Sky Friendly

Producing minimal to zero light pollution above the horizontal plane, Niland LED fixtures are dark sky friendly. By pointing our LEDs directly to the ground, qualifies these units as full cut-off.

Bulb Free

LED's contain no arc tube or bulb, and each unit is vibration and impact resistant.

IP65 RATED LED CHAMBERS

Niland LED full cut-off units also come standard with IP65 rated gaskets for the LED chambers.

Instant "ON"

No re-strike delay or cold starting. Additional savings can be achieved with the use of motion detectors. Our ability to run our units at 30% until a motion sensor activates the units to full power, saves you even more.

HIGHEST THERMAL PROTECTION RATING IN THE INDUSTRY

Only Niland heat sinks are over engineered to dissipate the heat generated by Niland LEDs quickly and efficiently.



Thermal management is the only way to guarantee LED longevity.



A study prepared by PG&E and Energy Solutions in Oakland, CA reported the comparison between a 121-Watt HPS and 78-Watt LED luminaires. As shown above, the LED's CRI (up to 80) is much higher than the HPS(30) and allows for more crisp visibility.

Typical Savings

The graph and table to the right show the savings per street light over a ten-year period when comparing Niland LED street light luminaires to standard high pressure sodium street lighting lamps.

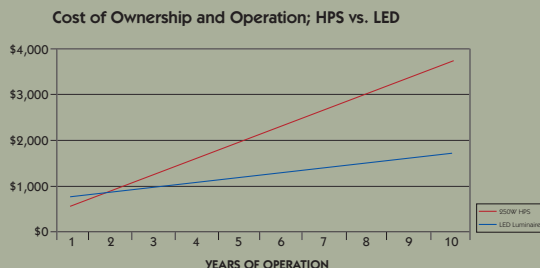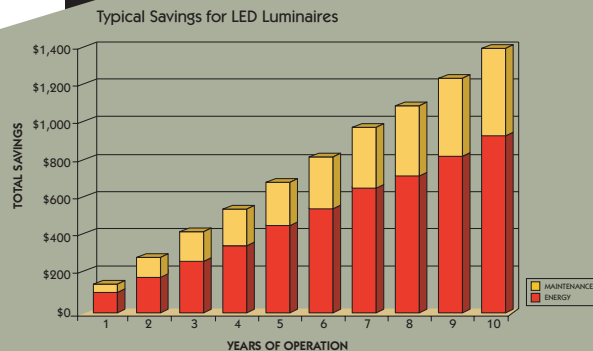

ALL LED PRODUCTS MANUFACTURED IN THE UNITED STATES.



OUTDOOR LIGHTING SPECIALISTS SINCE 1972
320 N Clark Drive · El Paso, TX 79905
ph:(800)648-9013 toll free fx:(888)779-3065 toll free

UP TO

64%
ENERGY SAVINGS

NILAND/LED
Leading the Way For Solid State Street Lighting

www.nilandco.com

RETROFIT UNITS

Color Rendition Index

CRI of up to 80, the highest in the industry when compared to HPS(20-25) and MH(65-70). After 40 years, the human visual sensitivity for yellow light diminishes. Niland LED panels are offered with a bright white light that will sustain visibility significantly beyond that of high pressure sodium and metal halide by utilizing individual LEDs with up to 6500K Rating.


Post Top LED Retrofit

Lighting Distribution: Type V (short or medium)


UP TO
68%
Electricity Savings




30ft Maximum Height
Up to 175 Watt Equivalent

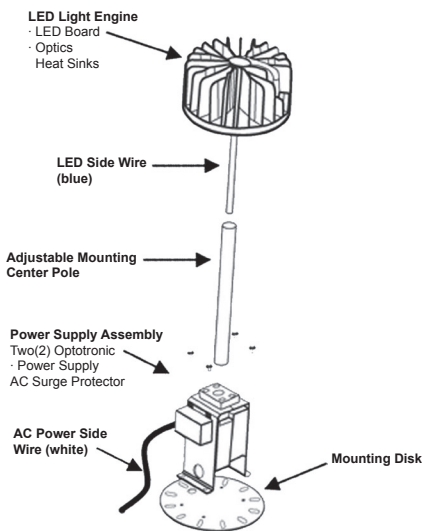

Light Engine



Power Supply



LED Panels

All electrical components and materials shall be UL-recognized and wired by a certified UL technician. The electrical assembly is prewired with quick disconnects for easy installation. AC surge protector and Optotronic power supplies are prewired. LED unit reduces energy consumption up to 70%. LED driver shall be rated a full load with less than 20% THD and greater than 0.9 power factor.

LED Power Supply

Voltage Range: 120 - 277V AC
Power Factor: PF0.95/120VAC
Efficacy (lm/W): 62 - 64
Typical Lumens: 3,500 - 3,400


Wattage Range: 54W - 59W
Optional Kelvins: 5000K or 5700K
Optional CRI: 70 or 75
Operating Temperature: -30C to 40C

Roadway Retrofit or Complete Unit


Lighting Distribution: Type II, III or V
IP65 Rates LED Chamber

UP TO
62%
Electricity Savings


40ft Maximum Height
(90 Individual LEDs)
Up to 250 Watt Equivalent

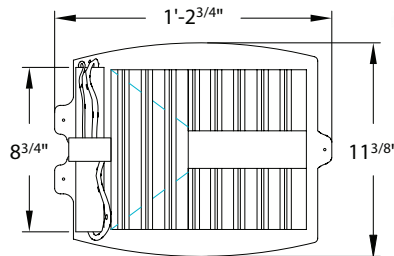


TOP VIEW



SIDE VIEW



SIDE VIEW



BOTTOM VIEW

- (A) Quick disconnect terminal block
- (B) Aluminum heat sink with heat transfer ceramic coating
- (C) Felt gasket, IP65 rated chamber
- (D) 90 Individual high power CREE XPG LEDs in angled panel design
- (E) Intelligent power supply with wattage adjustment port (factory preset)

LED Panels

90 individual, CREE XPG LED's rated for over 100,000 hours service life. 5000 Kelvin white LED's are standard with a CRI of 72, 3500 Kelvins "warm white" LED's are optional.

LED Power Supply

Voltage Range: 90 - 305VAC
Frequency Range: 47 - 63Hz
Power Factor: PF0.95/230VAC
Efficiency: 90% - 94%
AC Current: 4A/115VAC ; 2A/230VAC
Inrush Current: Cold Start 75A/230VAC
Leakage Current: <0.75mA/277VAC

Min/Max Working Temp: -30/+60°C
Wattage Range: 25 - 150 watts
Protections: short circuit, overload, over voltage and over temperature
Built-in Active PFC function
OCP point adjustable through output cable or internal potential meter

All LED units are equipped with Multiple Circuit, Surge and Temperature Protections. Please contact manufacturer for full details.

UP TO **62%**
ENERGY SAVINGS

NILAND/LED
Leading the Way For Solid State Street Lighting
www.nilandco.com

COMPLETE UNITS

Color Rendition Index

CRI of up to 80, the highest in the industry when compared to HPS(20-25) and MH(65-70). After 40 years, the human visual sensitivity for yellow light diminishes. Niland LED panels are offered with a bright white light that will sustain visibility significantly beyond that of high pressure sodium and metal halide by utilizing individual LEDs with up to 6500K Rating.

Complete units from our Twilight Series offer full cut-off options with competitive distribution types.


Twilight Series LED Complete Units

Lighting Distribution: Type II, III or V
(90 Individual LEDs)

Jamestown LED (JT-LED)




Opened Side View

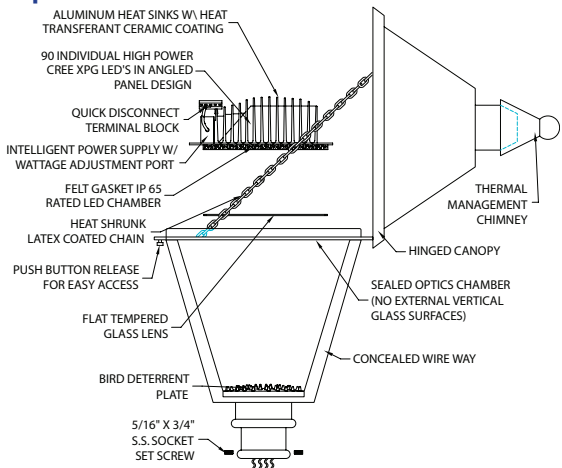


Up to 250 Watt Equivalent
IP65 Rates LED Chamber

Barcelona LED (BA-CON-LED)

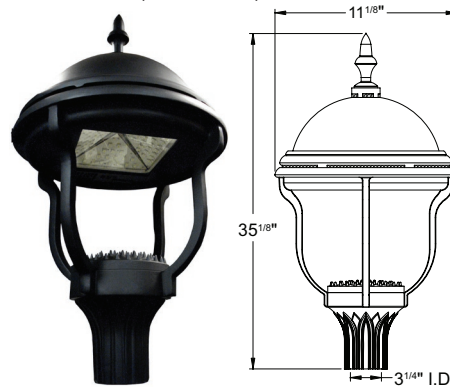

Opened Side View

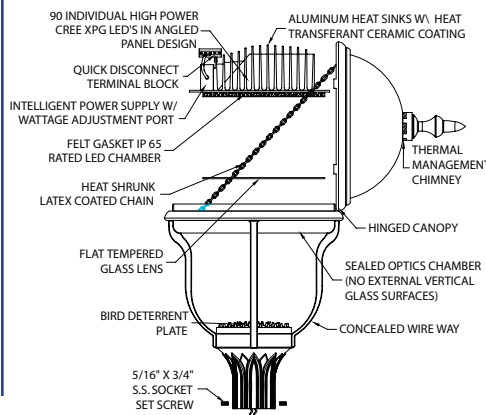

UP TO **62%**
Electricity Savings

New Yorker Roadway LED


Lighting Distribution: Type II, III or V
(90 Individual LEDs)

Up to 250 Watt Equivalent


UP TO **62%**
Electricity Savings




Opened Side View

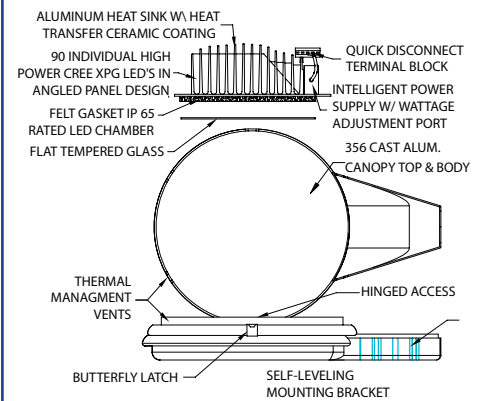

Front View



Bottom View

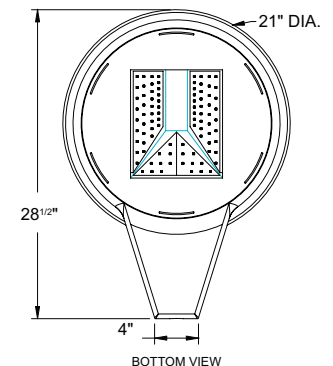


Niland LEDs are offered with 5000K as a standard light temperature. 3500K are available upon request.

Additional Luminaires From The Twilight Series:

Photometric data available upon request.



Below is a comparison image to show the optional Kelvins Niland LEDs offer.

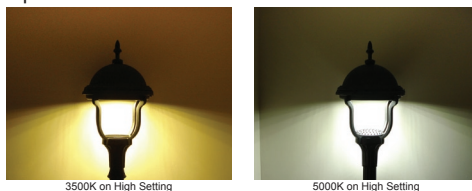

Automatic voltage recognition from 90 to 305 VAC. Optional 480VAC.

Soft start ramp up coupled with the industries highest rated heat sinks for thermal control rate these products for up to 30 years of service-free life.

All LED units are equipped with Multiple Circuit, Surge and Temperature Protections. Please contact manufacturer for full details.

ALL LED PRODUCTS MANUFACTURED IN THE UNITED STATES.

UP TO **62%**
ENERGY SAVINGS

NILAND/LED
Leading the Way For Solid State Street Lighting

www.nilandco.com


COMPLETE UNITS

Monarch Roadway Series LED Complete Units


Catalog Name: **MON-RW-LED**

Lighting Distribution: Type II, III or V
(90 Individual LEDs)

Up to 400 Watt Equivalent
IP65 Rates LED Chamber

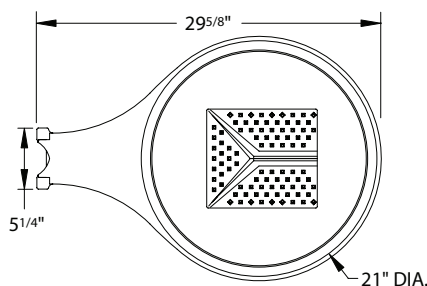

BOTTOM VIEW






FRONT VIEW

- (A) Twist -Lock Photocell (Optional)
- (B) Full Cast Aluminum Body
- (C) Hinged For Easy Access
- (D) Mounting Brackets
- (E) Flat Tempered Glass Lens
- (F) Intelligent power supply with wattage adjustment port (factory preset)
- (G) Quick Disconnect Bracket
- (H) Felt Gasket, IP65 Rated LED Chamber
- (I) 90 Individual high power CREE XPG LEDs in angled panel design
- (J) Self-Cleansing External Heat Sinks

The Monarch Series is also available as a side mount for parking lot applications.

Catalog Name: **MON-SM-LED**

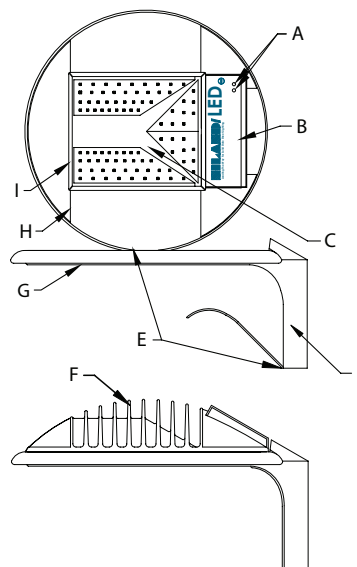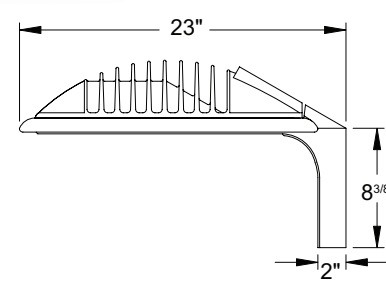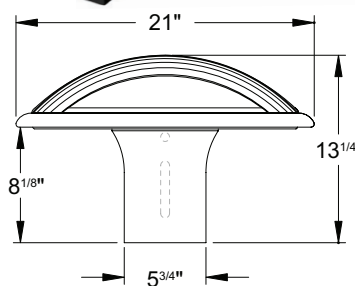

- (A) Wattage Adjustment Ports
- (B) Intelligent power supply (factory preset)
- (C) 90 Individual high power CREE XPG LEDs in angled panel design
- (D) Mounting Arm
- (E) Hinged For Easy Access
- (F) Self-Cleansing External Heat Sinks
- (G) Flat Tempered Glass
- (H) Full Cast Aluminum Canopy and Body
- (I) Felt Gasket, IP65 Rated LED Chamber

LED Panels

Panels are directly mounted to aluminum casting. Direct mounting provides maximum heat dissipation thus adding to LED overall longevity. 90 individual, CREE XPG LED's rated for over 100,000 hours service life. 5000 Kelvin white LED's are standard with a CRI of 72, 3500 Kelvins "warm white" LED's are optional.

LED Power Supply


Voltage Range: 90 - 305VAC
Frequency Range: 47 - 63Hz
Power Factor: PF0.95/230VAC
Efficiency: 90% - 94%
AC Current: 4A/115VAC ; 2A/230VAC

AC Current: 4A/115VAC ; 2A/230VAC
Inrush Current: Cold Start 75A/230VAC
Leakage Current: <0.75mA/277VAC
Min/Max Working Temp: -30/+60°C

Wattage Range: 25 - 200 watts
Protections: short circuit, overload, over voltage and over temperature
Built-in Active PFC function
OCP point adjustable through output cable or internal potential meter

UP TO **62%**
ENERGY SAVINGS

Model: BA - CON - LED
Photometric Data Based on
100WLED, 10ft mounting height.

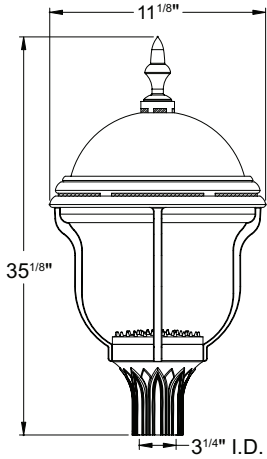

LED Panels

90 individual, CREE XPG LED's rated for over 100,000 hours service life. 5000 Kelvin white LED's are standard with a CRI of 72, 3500 Kelvins "warm white" LED's are optional.

LED Power Supply

Voltage Range: 90 - 305VAC
Frequency Range: 47 - 63Hz
Power Factor: PF0.95/230VAC
Efficiency: 90% - 94%
AC Current: 4A/115VAC ; 2A/230VAC
Inrush Current: Cold Start 75A/230VAC
Leakage Current: <0.75mA/277VAC
Min/Max Working Temp: -30/+60°C
Wattage Range: 25 - 150 watts
Protections: short circuit, overload, over voltage and over temperature
Built-in Active PFC function
OCP point adjustable through output cable or internal potential meter

Additional Luminaires From Twilight Series:

(Photometric data available upon request.)




Charcteristics:


IES Classification	Type II
Longitudinal Classification	Medium
Cutoff Classification (deprecated)	Cutoff
Lumens Per Lamp	176.4 (54 lamps)
Total Lamp Lumens	9525.6
Luminaire Lumens	5282
Total Luminaire Efficiency	55%
Downward Total Efficiency	55%
Upward Waste Light Ratio	0.00
Maximum Candela	3284.817

Maximum Candela Angle	90H 70V
Maximum Candela At 90 Degreess Vertical	3.58 (0.0% Lamp Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	635.663 (6.7% Lamp Lumens)
Total Luminaire Watts	96.89
Ballast Factor	1.00
Bug Rating	B2-U1-G2

T2 D Med Cutoff LED100 - Isofootcandle Lines of Horizontal Illuminance

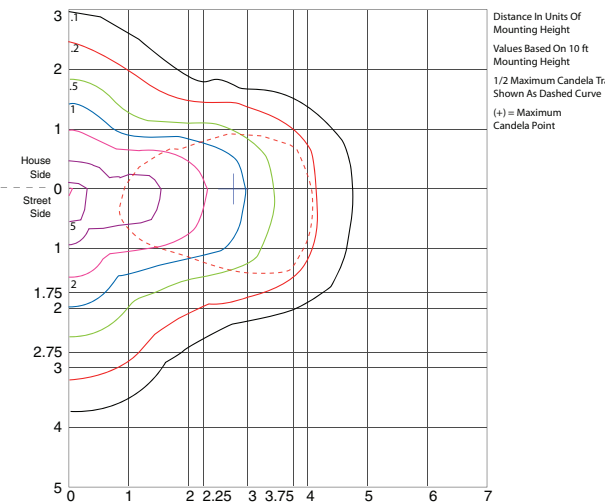

T2 D Med Cutoff LED100 - Polar Graph

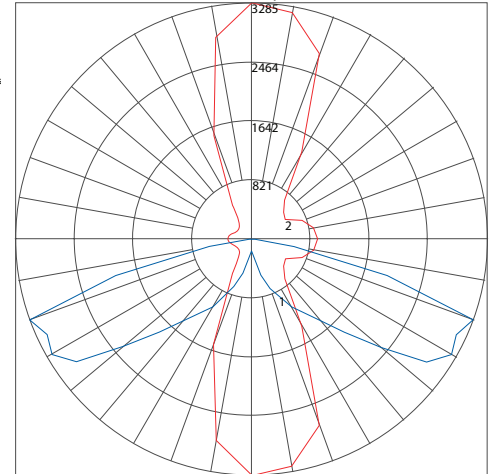


Maximum Candela = 3284.817 Located At Horizon Angle = 90, Vertical Angle = 70
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (70) (Through Max Cd.)

Charcteristics:


IES Classification	Type III
Longitudinal Classification	Short
Cutoff Classification (deprecated)	Cutoff
Lumens Per Lamp	176.4 (54 lamps)
Total Lamp Lumens	9525.6
Luminaire Lumens	5194
Total Luminaire Efficiency	55%
Downward Total Efficiency	54%
Upward Waste Light Ratio	0.00
Maximum Candela	3258.247

Maximum Candela Angle	60H 60V
Maximum Candela At 90 Degreess Vertical	3.58 (0.0% Lamp Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	592.84 (6.2% Lamp Lumens)
Total Luminaire Watts	96.89
Ballast Factor	1.00
Bug Rating	B1-U1-G1

T3 G Short Cutoff LED100 - Isofootcandle Lines of Horizontal Illuminance

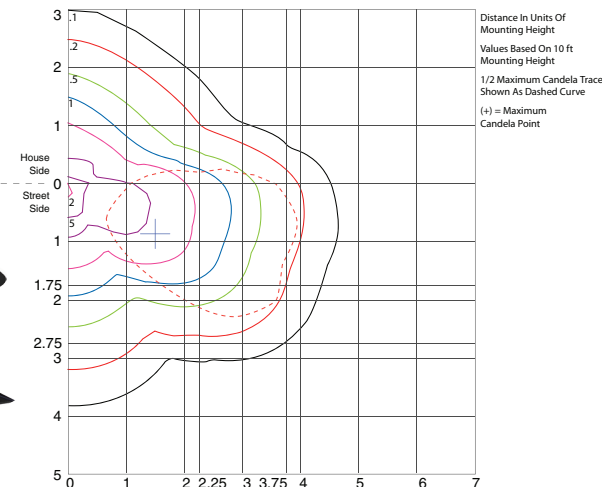

T3 G Short Cutoff LED100 - Polar Graph


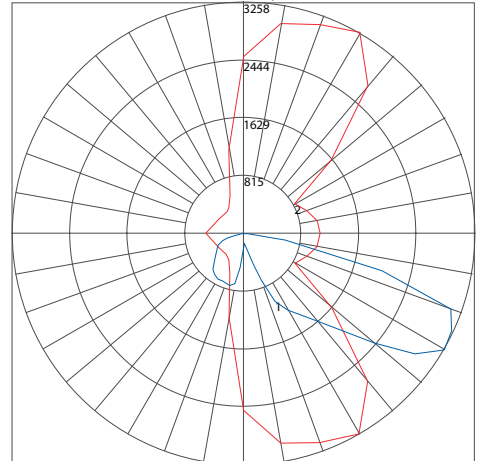


Maximum Candela = 3284.817 Located At Horizon Angle = 90, Vertical Angle = 70
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (70) (Through Max Cd.)

UP TO **62%**
ENERGY SAVINGS

Model: RW - RF - LED

Photometric Data Based on 100WLED, 10ft mounting height.

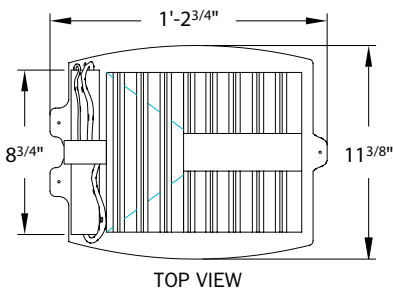


Characteristics:


IES Classification	Type II
Longitudinal Classification	Medium
Cutoff Classification (deprecated)	Semi-Cutoff
Lumens Per Lamp	176.4 (54 lamps)
Total Lamp Lumens	9525.6
Luminaire Lumens	6728
Total Luminaire Efficiency	71%
Downward Total Efficiency	71%
Upward Waste Light Ratio	0.00
Maximum Candela	3786.541

Maximum Candela Angle	80H 70V
Maximum Candela At	
90 Degrfees Vertical	19.551 (0.2% Lamp Lumens)
Maximum Candela from	
80 to <90 Degrees Vertical	1155.368 (12.1% Lamp Lumens)
Total Luminaire Watts	96.89
Ballast Factor	1.00
Bug Rating	B2-U2-G2

T2 D Med Semi LED100 - Isofootcandle Lines of Horizontal Illuminance

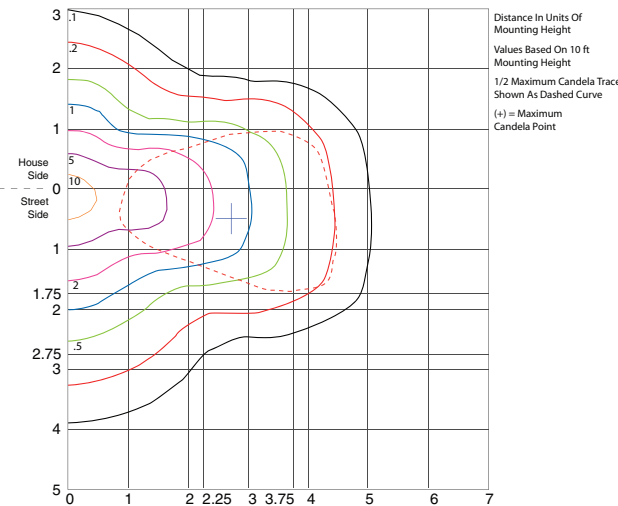

T2 D Med Semi LED100 - Polar Graph

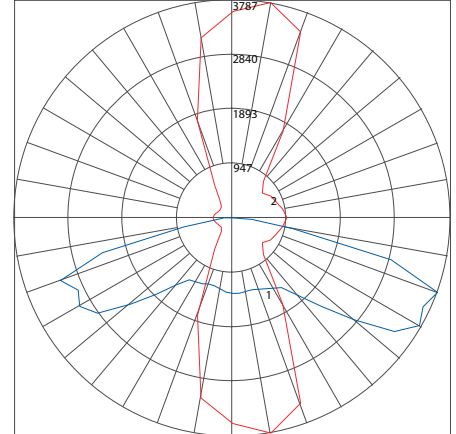


Characteristics:


IES Classification	Type III
Longitudinal Classification	Medium
Cutoff Classification (deprecated)	Semi-Cutoff
Lumens Per Lamp	176.4 (54 lamps)
Total Lamp Lumens	9525.6
Luminaire Lumens	7614
Total Luminaire Efficiency	80%
Downward Total Efficiency	80%
Upward Waste Light Ratio	0.00
Maximum Candela	5285.416

Maximum Candela Angle	60H 70V
Maximum Candela At	
90 Degrfees Vertical	19.551 (0.2% Lamp Lumens)
Maximum Candela from	
80 to <90 Degrees Vertical	1834.819 (19.3% Lamp Lumens)
Total Luminaire Watts	96.89
Ballast Factor	1.00
Bug Rating	B2-U3-G2

T3 G Med Semi LED100 - Isofootcandle Lines of Horizontal Illuminance

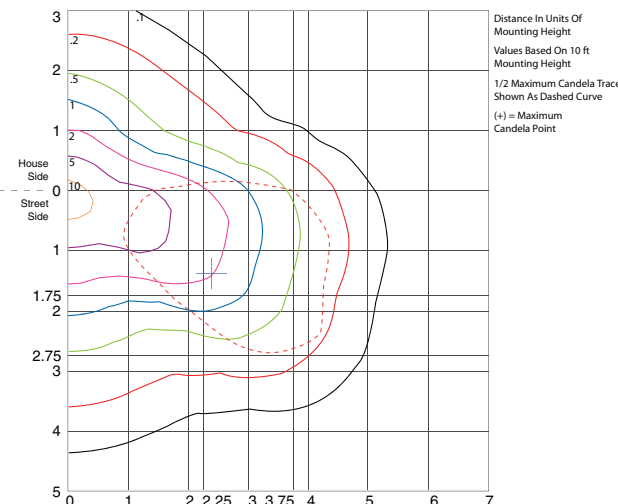

T3 G Med Semi LED100 - Polar Graph

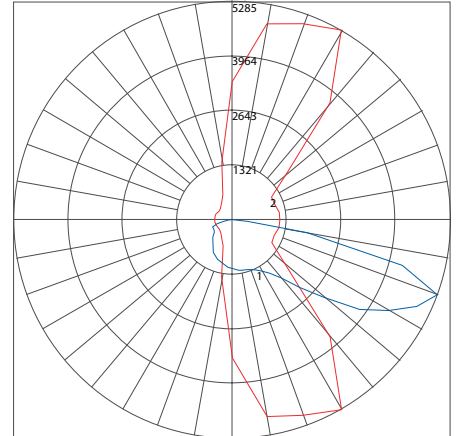

LED Panels

90 individual, CREE XPG LED's rated for over 100,000 hours service life. 5000 Kelvin white LED's are standard with a CRI of 72, 3500 Kelvins "warm white" LED's are optional.

LED Power Supply


Voltage Range: 90 - 305VAC
Frequency Range: 47 - 63Hz
Power Factor: PF0.95/230VAC
Efficiency: 90% - 94%
AC Current: 4A/115VAC ; 2A/230VAC
Inrush Current: Cold Start 75A/230VAC
Leakage Current: <0.75mA/277VAC
Min/Max Working Temp: -30/+60°C
Wattage Range: 25 - 150 watts
Protections: short circuit, overload, over voltage and over temperature
Built-in Active PFC function
OCP point adjustable through output cable or internal potential meter



Thermal Management Key to LED Longevity

Over Engineered to **Add 35%**
 Safety Margin Factor on
 Niland Exclusive Heat Sinks

The heat generation rate of the entire 250W equivalent LED system is 96Watts using 90 individual 1W LEDs. The Niland Barcelona fixture is capable of minimizing the heat by combining the heat sink around the LED arrays and keeping the proper ventilation for the air flow around it. The ambient air comes in through the side vents, flows around the heat sinks (the extended metal fins around the LED panels), becomes hot after collecting the heat and exits the fixture through the upper vents right below the finial. The entire heat transfer process is done by the combination of both conduction and natural convection mode of heat transfer. The heat sink material has excellent thermal conductivity.

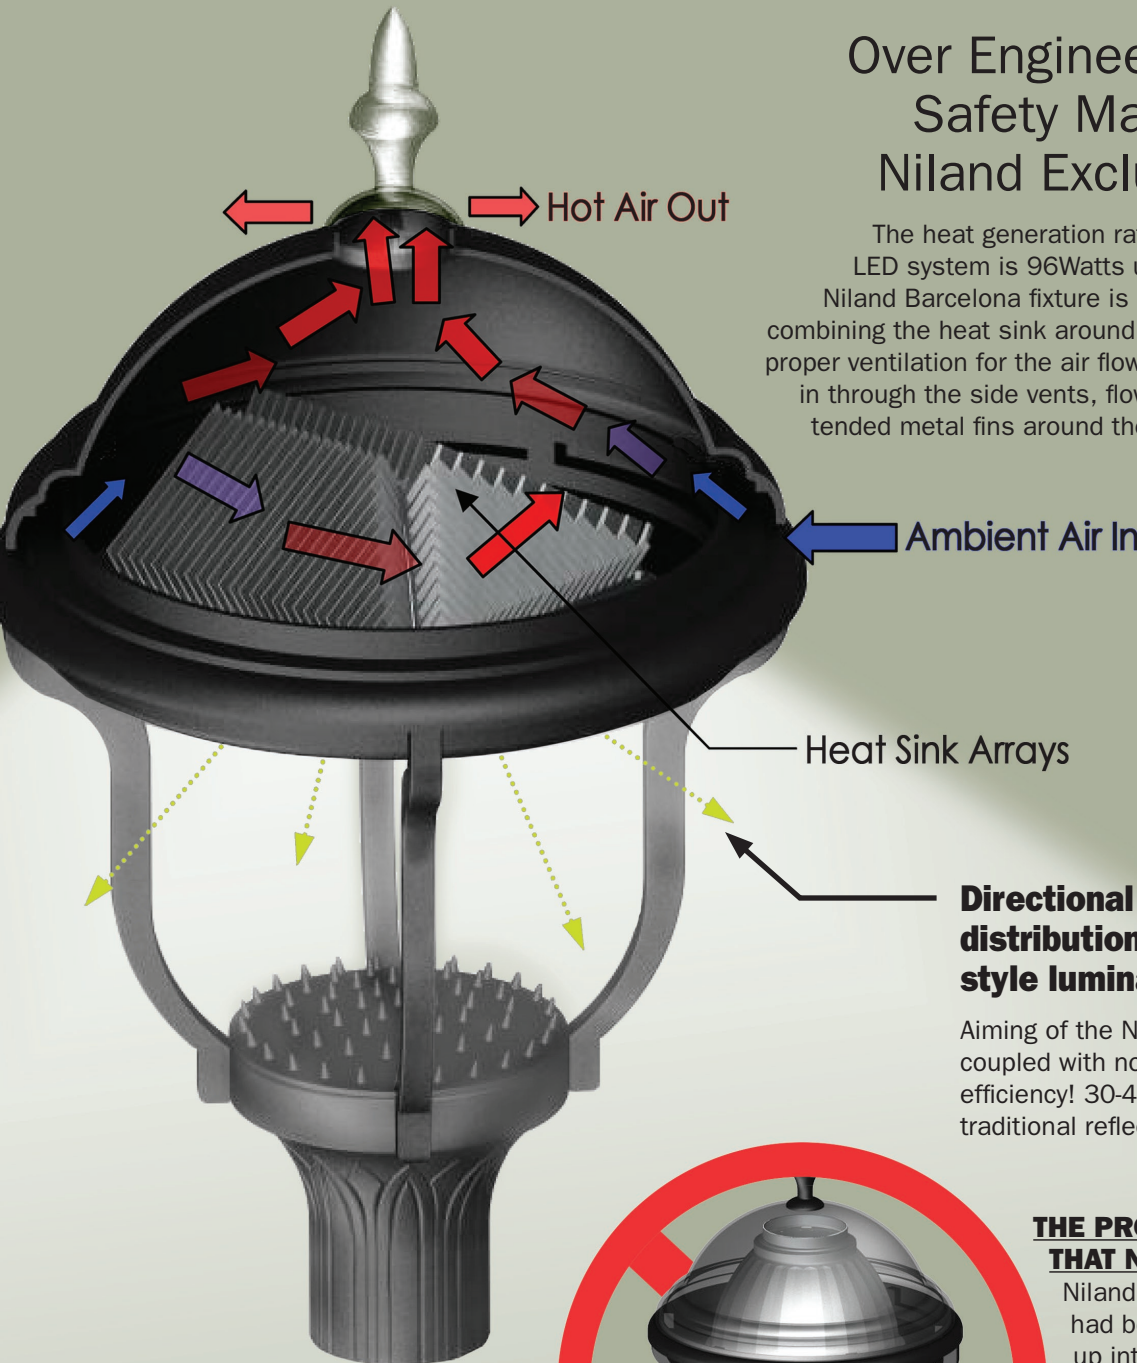

Directional LED's yield full cutoff light distribution in an otherwise cut off style luminaire.

Aiming of the Niland LEDs directly to the ground coupled with no reflector system means 100% efficiency! 30-40% of light output is lost in traditional reflector systems.



THE PROTOTYPE THAT NEVER WAS

Niland Company's original prototype had been tested with LEDs pointing up into a reflector system, which proved unsuccessful. The unit lost over 46% of its light output inside the reflector. The energy savings was lost. Niland Company quickly had to change gears and realized that by pointing the LEDs to the ground, 100% efficiency is achieved.

OUTDOOR LIGHTING SPECIALISTS SINCE 1972

320 N Clark Drive
 El Paso, TX 79905
 ph:(800)648-9013 toll free
 fx:(888)779-3065 toll free