


# SANTA FE SERIES

## SF-1

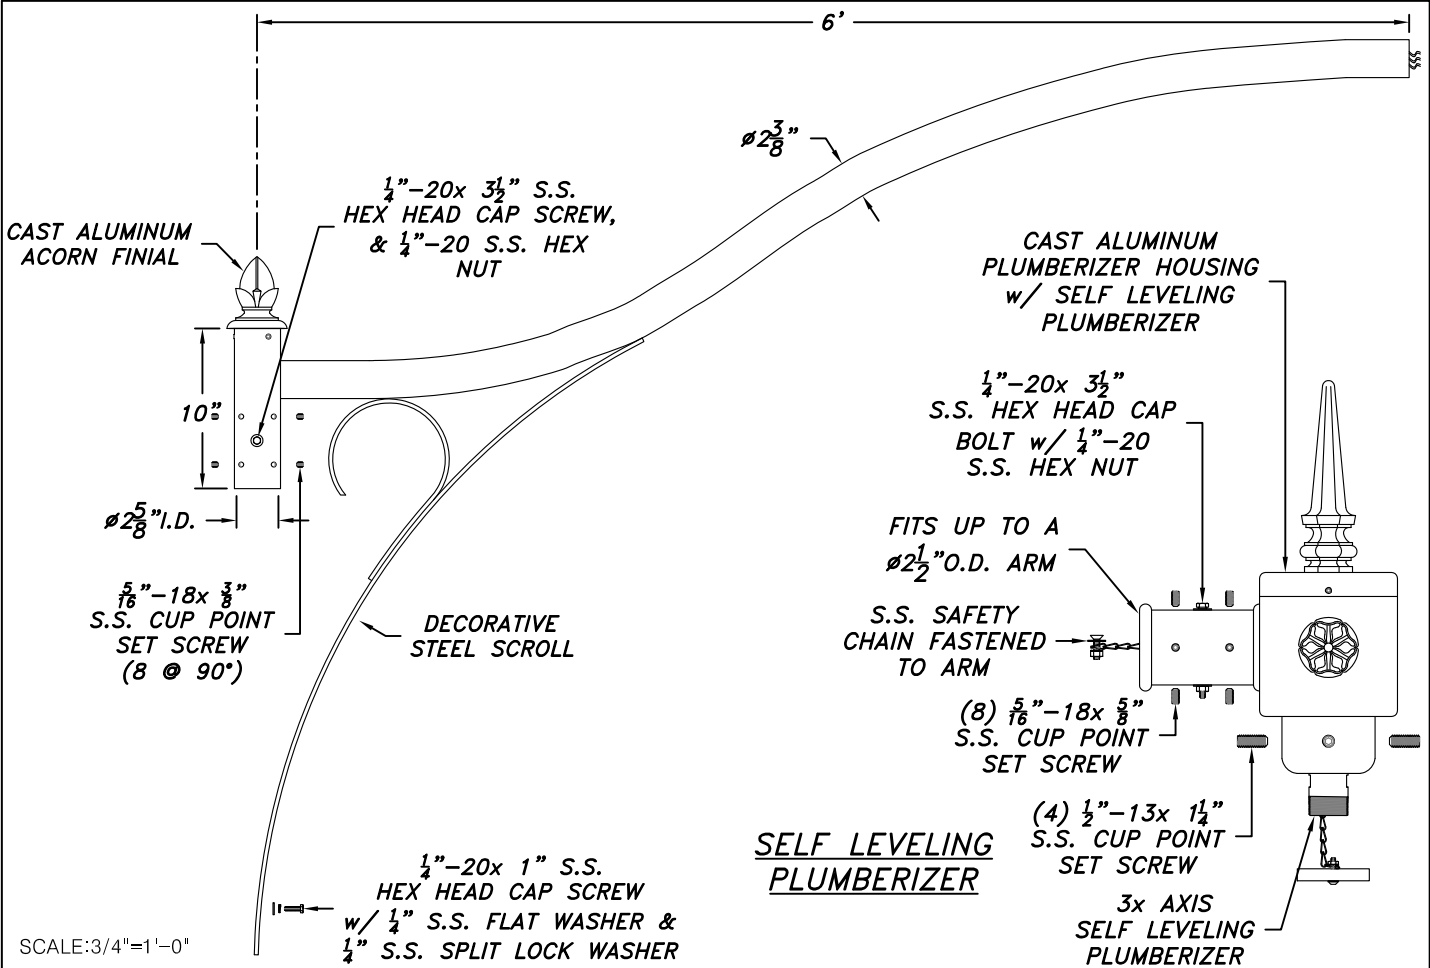

### EXAMPLE

SF-1-BLK

SF- \_\_\_\_\_ - 1 - \_\_\_\_\_  
Series Size Arms Color

### ARM LENGTH

- 4Ft - SMALL
- 6FT
- 8Ft - LARGE

### ARM PER POLE

- SINGLE
- DOUBLE

### COLOR OF POWDER COAT FINISH

- (BLK) BLACK
- (BRZ) BRONZE
- (GRN) GREEN
- (HG) HAND BRUSHED GREEN
- (HR) HAND BRUSHED GRAY
- CUSTOM \_\_\_\_\_

## ARM SPECIFICATION

### ARM

The arms shall be steel construction. Extrusion shall be 11 gauge ( $\frac{1}{8}"$ ) wall thickness with no warping or mold shifting. Electrical wiring shall run through arm up and out through the  $\phi 3"$  opening.

### ELECTRICAL

All electrical wiring is ran through center shaft and arm and shall be UL-recognized and wired by a certified UL technician. The electrical assembly is prewired with quick disconnects for servicing. Fixture shall be UL certified for wet locations.

### MOUNTING

Arm shall be mounted to a  $\phi 2\frac{3}{8}"$  W.x 6"H. Tenon and fastened using (3) stainless steel set screws.

### FINISH

Fixture finish shall consist of degreasing, phosphate acid etching with 140+ deionized water, rinsed, oven dry off and top coated with a thermoset TGIC super polyester powder coat finish designed not to chalk or fade for many years. All Niland Company powders must pass a minimum 3000-hour salt spray test for corrosion resistance.

### CERTIFICATION

The Fixture shall be UL-Listed for wet location use, and all HID listings.

### WARRANTY

Fixture shall be warranted to be free of defects for five years. Ballast components shall carry the ballast manufacturers limited warranty of two years.

Catalog Name: SF-1 Date: 02.15.18

Revision History: N/A Revision #: 0

Niland Approval: Luis M. Gomez Customer Approval: \_\_\_\_\_ Page: 3 of 4



# Niland Company

NILAND COMPANY • PH: (915) 779-1405 • FAX: (915) 779-3618 • E-MAIL: INFO@NILANDCO.COM  
320 N. Clark El Paso, Tx 79905 • PH: 800-848-9013 • FAX: 888-779-3065 • WEB PAGE: HTTP://www.nilandco.com